



Visgard® 200/275 Anti-Fog Film

Abrasion and Scratch Resistant Anti-Fog Film

Visgard 200 — with Pressure Sensitive Adhesive

Visgard 275 — without Adhesive

DESCRIPTION

Abrasion resistant Anti-Fog coated polyester film with or without optically clear adhesive backing.

Visgard 200 — with Pressure Sensitive Adhesive (including protective release liner).

Visgard 275 — without Adhesive (no liner).

The anti-fog surface also has a clear masking which protects the coated surface during installation. This must be removed after installation.

FEATURES

- With or Without Pressure Sensitive Adhesive (PSA)
- Excellent Abrasion, Scratch and Mar Resistance
- Hydrophilic
- Anti-Fog and Water Sheeting Performance
- Wet and Dry Application Compatible

FILM AND ADHESIVE REMOVAL

To remove film, slide a razor blade beneath one corner and lift slowly. Peeling too fast will cause adhesive to remain on the glass/plastic substrate surface. Any remaining trace of adhesive can be removed with hydrocarbon solvents (e.g. hexane, heptane, mineral spirits), PM glycol ethers or a 50-70% isopropyl alcohol solution in water.

Plastics should be tested first for solvent sensitivity.

FILM PROPERTIES

PROPERTY	TYPICAL VALUES
Thickness*	2 or 4 mil
Appearance**	Clear and colorless
Visible Light Transmission	90%
Recommended Application Temperature	20 - 25°C (68 - 77°F)
Tear Strength (initial)	
2 mil	1.9 kg (4.2 lbs)
4 mil	3.8 kg (8.4 lbs)
Taber (Δ Haze) - 100 cycles ASTM D1044	<10%
Falling Sand (Δ Haze) ASTM D968	1.49%
Anti-fog (TM-103B)	Pass

*The adhesive release liner and masking thickness are additional to the thickness of the base film.


** The removable masking is also clear and must be removed.

ANTI-FOG PROPERTIES

Visgard 200/275 Film is hydrophilic which causes condensation to spread as a clear layer, rather than form droplets which appear as fog. Although it absorbs moisture, the coating does not dissolve in water, so it will not smudge when wet.

CARE INSTRUCTION

Treated surfaces may be cleaned with an ammonia-free glass cleaner and a sponge, tissue or paper towel. Cleaners containing alcohol may be used but the alcohol content should be <30%. Do not use cleaners which contain moisturizers, abrasives, strong acids, or caustic substances. Remove any oily contamination with a grease cutting cleaner.

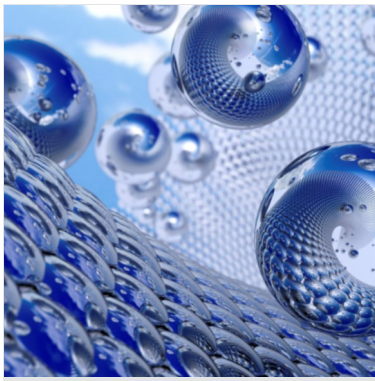

Visgard® 200/275 Anti-Fog Film

Abrasion and Scratch Resistant Anti-Fog Film

CONTACT INFORMATION

**FSI Coating Technologies
Corporate Office - N.A.**
45 Parker, Suite 100
Irvine, California 92618 USA
Tel: +1-949-540-1140
Fax :+1-949-540-1150
technicalsupport@fsicti.com

**SDC Technologies - Americas
Corporate Headquarters**
45 Parker, Suite 100
Irvine, CA 92618 USA
800-272-7681 (Toll Free USA)
Tel: +1-714-939-8300
technicalsupport.ca@sdctech.com

SDC Technologies - Europe
Unit 7, Avondale Industrial Estate
Pontrhydryn Cwmbran
NP44 1UG, Great Britain
Tel: +44-1633-627030
technicalsupport.eu@sdctech.com

SDC Technologies - China
1585 Gumei Road
Xuhui District
Shanghai 200233
China
Tel: +86-21-61517768
customer-care.cn@sdctech.com

**SDC Technologies Asia Pacific Pte.
Ltd.**
27 Tuas South Street 1
Singapore 638035
Tel: +65-6210-6355
customer-care.ap@sdctech.com

fsi

Coating Technologies

fsicti.com

©2021 FSI Coating Technologies, Inc. All rights reserved. FSI Coating Technologies is a wholly-owned subsidiary of SDC Technologies, Inc.

Visgard® is a registered trademark of FSI Coating Technologies, Inc

20191206_200/275 Film

INSTALLATION

Pressure Sensitive Adhesive (PSA) - Visgard 200

FSI Coating Technologies uses an optically clear adhesive recommended for use with pressure roll laminating machinery, or by professional installers familiar with the handling of adhesive films. The adhesive bonds immediately to glass and plastics. Peel strength increases slightly after 5 to 10 days. The adhesion bond strength will be reduced after extended immersion in water, but bond will re-strengthen upon drying.

Installation with Laminating Machinery

A clean room environment is recommended when applying Visgard Film with a pressure laminator. If a clean room is not available, dust may be removed with an ionized air gun connected to a supply of compressed air. A film lamination that is free of contamination may be easier to accomplish in two steps. First, laminate a tacky material to the substrate. Then as a second step peel the tacky material as the sheet enters the nip in such a way that the time of exposure to contaminated air is minimized.

Installation by Hand

Where laminating machinery is not available or not practical, Visgard Film may be installed by hand using a wet application technique. To prevent premature “grab” which will trap pockets of air or water use a wetting solution for pressure sensitive adhesives such as up to 1.0% baby shampoo in distilled water. Filter solution before use. This detergent solution allows the film to be positioned and then locked in place with light force so it will not shift when squeegee pressure is applied. Install on a clean (very important) surface which is flat or curved in one dimension only. With the dilute detergent solution, spray the surface to be treated.

Separate the release liner from the adhesive side with cellophane tape attached to front and back of a single corner. Spray the exposed adhesive side with detergent solution and put in place but without pressure. Then spray the film surface with detergent solution so the squeegee glides and apply pressure with a urethane squeegee to evacuate liquid from beneath the film. Use overlapping strokes to prevent trapping pockets of water or air. If milky blotches appear it is due to excess water remaining after installation. The water will dry and the blotches and distortion will disappear.

Please contact FSICT Technical Support for further information regarding application instructions or visit fsicti.com.

WARRANTY AND LIABILITY LIMITATIONS

Information contained herein is accurate to the best of our knowledge. The properties listed herein represent typical values for Visgard 200/275 Film and are not meant as specifications. FSICT insists that users conduct their own tests for applicability and fitness for any purpose. Statements concerning use of products or formulations described herein shall not be construed as a warranty or license to infringe any patent or trademark, and no liability for infringement arising out of such use is assumed. Please refer to FSICT Standard Terms and Conditions or to your Purchase Agreement with FSICT for the warranty coverage of FSICT’s product.

PRODUCT SHIPPING AND AVAILABILITY

Typical lead-time for shipment of Visgard 200/275 Film is four (4) weeks from confirmation of a purchase order. FSI provides several shipping options. Please contact an FSI representative to determine which option best fits your needs.

SDC
Technologies

